


NDP-15BA □ · 15BS □

1Bar = 0,1MPa



TECHNICAL DATA				Pump type NDP-15BS.			
Air supply pressure	0,2-0,7	MPa		Max. viscosity (neg. suc.)	3.000	Cp	
Max. discharge volume/cycle	125	Cc		Max. viscosity (flooded suction.)	5.000	Cp	
Max. discharge volume	50	L/min		Max. air consumption	450	NL/min	
Max. discharge pressure	0,7	MPa		Max. noise level	81	dB(a)	
Max. size of solids	1	mm		Operating temp. ambient	70	°C	
Max. suction lift dry	PTFE fitted	1,5	m	Max operating temp. fluid			
Max. suction lift wet	PTFE fitted	3,5	m	Diaphragm compound	NBR /CR	82	°C
Max. fluid inlet pressure	PTFE fitted	0,03	MPa	Diaphragm compound	EPDM/ TPO/ PTFE	100	°C
Max. suction lift dry	Rubber fitted	2,5	m	Diaphragm compound	TPEE /FPM	120	°C
Max. suction lift wet	Rubber fitted	5,5	m				
Max. fluid inlet pressure	Rubber fitted	0,1	MPa	Net Weight	Type S	SUS	6,2 Kg
Caution! Data based on water (1 Cp)							
Wetted parts: Pump chambers + manifolds				SCS14 - Stainless steel 316			
Motor				PPS - Ryton			

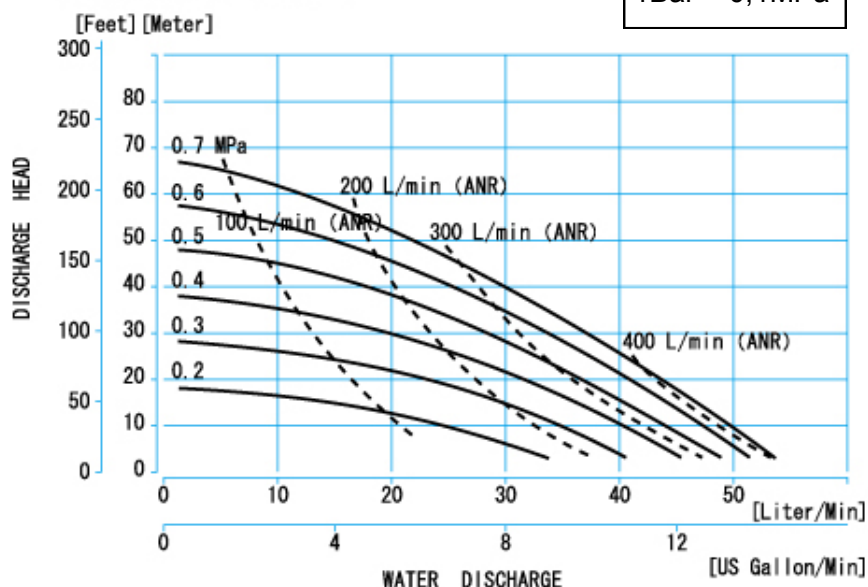