




NDP-20BP □ flange

1Bar = 0,1MPa

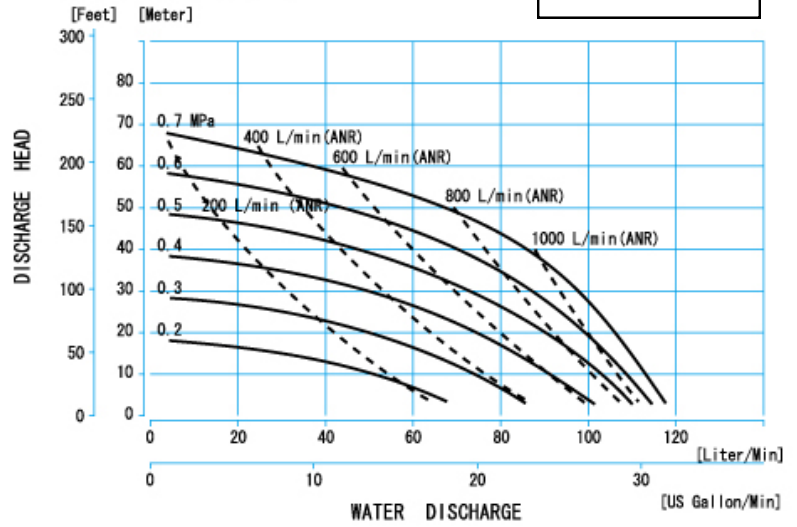

TECHNICAL DATA				Pump type NDP-20BP.-PP (NDP-P20BP.)				
Air supply pressure	0,2-0,7	MPa		Max. viscosity (neg. suc.)	5.000	Cp		
Max. discharge volume/cycle	500	Cc		Max. viscosity (flooded suction.)	10.000	Cp		
Max. discharge volume	110	L/min		Max. air consumption	1300	NL/min		
Max. discharge pressure	0,7	MPa		Max. noise level	89	dB(a)		
Max. size of solids	2	mm		Operating temp. ambient	70	°C		
Max. suction lift dry	PTFE fitted	-	m	Max operating temp. fluid				
Max. suction lift wet	PTFE fitted	-	m	Diaphragm compound	CR / NBR	82	°C	
Max. fluid inlet pressure	PTFE fitted	-	MPa	Diaphragm compound	EPDM / TPO	82	°C	
Max. suction lift dry	Rubber fitted	5,5	m	Diaphragm compound	TPEE / FPM	82	°C	
Max. suction lift wet	Rubber fitted	9.0	m					
Max. fluid inlet pressure	Rubber fitted	0,1	MPa	Net Weight	Type P	PPG	8,2	Kg
Caution! Data based on water (1 Cp)				* FLG - DIN FLANGE CONNECTION AVAILABLE				
Wetted parts: Pump chambers + manifolds				PPG - Polypropylene reinforced with glass fiber				
Motor				PPG - Polypropylene reinforced with glass fiber				

