




NDP-20BAT, BST

1Bar = 0,1MPa

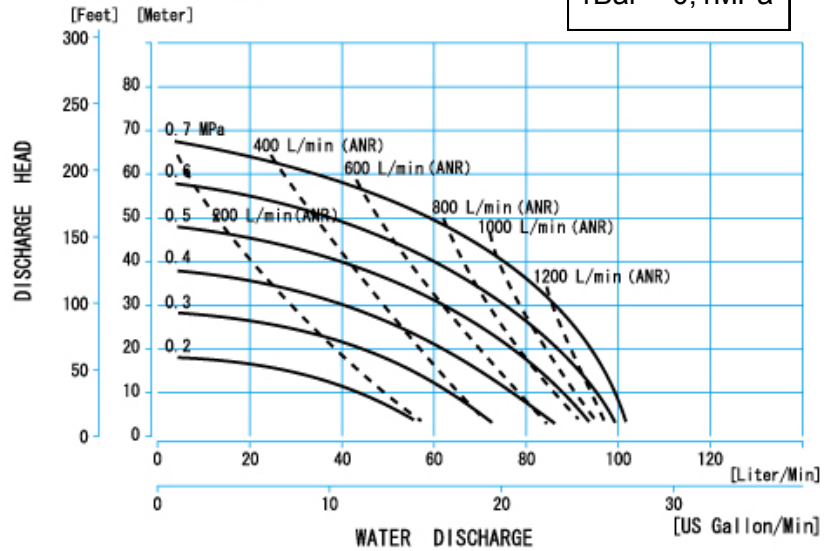

TECHNICAL DATA			Pump type NDP-20BST		
Air supply pressure	0,2-0,7	MPa	Max. viscosity (neg. suc.)	5.000	Cp
Max. discharge volume/cycle	513	Cc	Max. viscosity (flooded suction.)	10.000	Cp
Max. discharge volume	100	L/min	Max. air consumption	1400	NL/min
Max. discharge pressure	0,7	MPa	Max. noise level	89	dB(a)
Max. size of solids	2	mm	Operating temp. ambient	70	°C
Max. suction lift dry	PTFE fitted	4,0	<b>Max operating temp. fluid</b>		
Max. suction lift wet	PTFE fitted	8,3	Diaphragm compound		°C
Max. fluid inlet pressure	PTFE fitted	0,03	Diaphragm compound	PTFE	100
Max. suction lift dry	Rubber fitted		Diaphragm compound		°C
Max. suction lift wet	Rubber fitted				
Max. fluid inlet pressure	Rubber fitted		Net Weight	Type A	ALU
		MPa			13,9
					Kg

Caution! Data based on water (1 Cp)

Wetted parts: Pump chambers + manifolds      SCS14 - Stainless steel 316

Motor      SCS14 - Stainless steel 316

