




NDP-25BAT, BST, BFT

1Bar = 0,1MPa

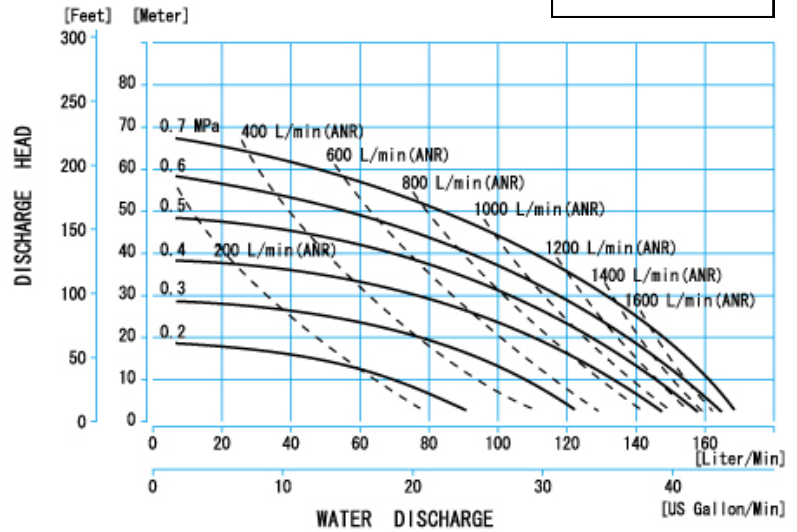

TECHNICAL DATA				Pump type NDP-25BAT			
Air supply pressure	0,2-0,7	MPa	Max. viscosity (neg. suc.)	5.000	Cp		
Max. discharge volume/cycle	714	Cc	Max. viscosity (flooded suction.)	10.000	Cp		
Max. discharge volume	150	L/min	Max. air consumption	1700	NL/min		
Max. discharge pressure	0,7	MPa	Max. noise level	89	dB(a)		
Max. size of solids	4,8	mm	Operating temp. ambient	70	°C		
Max. suction lift dry	PTFE fitted	4,5	m	Max operating temp. fluid			
Max. suction lift wet	PTFE fitted	8,3	m	Diaphragm compound			
Max. fluid inlet pressure	PTFE fitted	0,03	MPa	Diaphragm compound	PTFE	100	°C
Max. suction lift dry	Rubber fitted		m	Diaphragm compound			
Max. suction lift wet	Rubber fitted		m				
Max. fluid inlet pressure	Rubber fitted		MPa	Net Weight	Type A	ALU	13,0 Kg
Caution! Data based on water (1 Cp)							
Wetted parts: Pump chambers + manifolds				ADC12 - Aluminum			
Motor				ADC12 - Aluminum			

