


NDP-25BAT, BST, BFT

1Bar = 0,1MPa



TECHNICAL DATA				Pump type NDP-25BFT			
Air supply pressure	0,2-0,7	MPa		Max. viscosity (neg. suc.)	5.000	Cp	
Max. discharge volume/cycle	714	Cc		Max. viscosity (flooded suction.)	10.000	Cp	
Max. discharge volume	150	L/min		Max. air consumption	1700	NL/min	
Max. discharge pressure	0,7	MPa		Max. noise level	89	dB(a)	
Max. size of solids	4,8	mm		Operating temp. ambient	70	°C	
Max. suction lift dry	PTFE fitted	4,5	m	<b>Max operating temp. fluid</b>			
Max. suction lift wet	PTFE fitted	8,3	m	Diaphragm compound			
Max. fluid inlet pressure	PTFE fitted	0,03	MPa	Diaphragm compound	PTFE	100	°C
Max. suction lift dry	Rubber fitted		m	Diaphragm compound			
Max. suction lift wet	Rubber fitted		m				
Max. fluid inlet pressure	Rubber fitted		MPa	Net Weight	Type F	CS	19,9 Kg
Caution! Data based on water (1 Cp)							
Wetted parts: Pump chambers + manifolds				S45C - Forged iron type			
Motor				ADC12 - Aluminum			

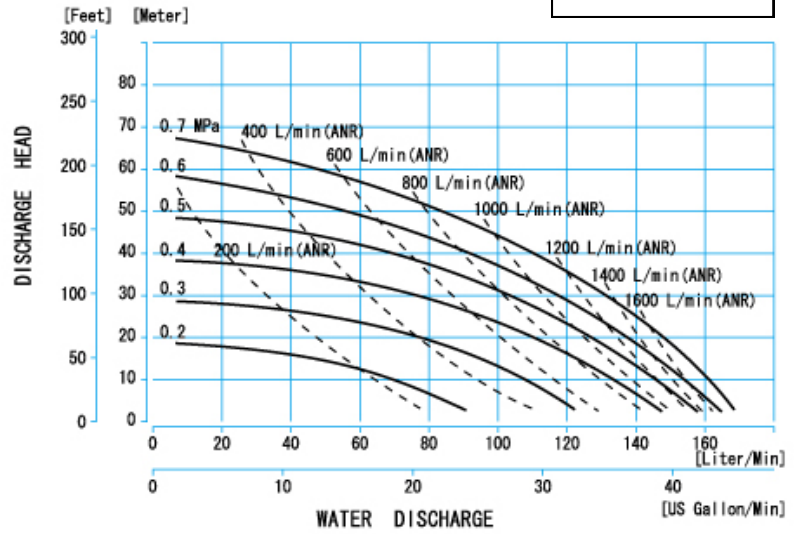