


NDP-40BAT, BST, BFT

1Bar = 0,1MPa



TECHNICAL DATA			Pump type NDP-40BAT-RC			
Air supply pressure	0,2-0,7	MPa	Max. viscosity (neg. suc.)	10.000	Cp	
Max. discharge volume/cycle	1400	Cc	Max. viscosity (flooded suction.)	30.000	Cp	
Max. discharge volume	350	L/min	Max. air consumption	3500	NL/min	
Max. discharge pressure	0,7	MPa	Max. noise level	82	dB(a)	
Max. size of solids	7	mm	Operating temp. ambient	70	°C	
Max. suction lift dry	PTFE fitted	4,0	m	Max operating temp. fluid		
Max. suction lift wet	PTFE fitted	8,1	m	Diaphragm compound		
Max. fluid inlet pressure	PTFE fitted	0,03	MPa	Diaphragm compound	PTFE	100 °C
Max. suction lift dry	Rubber fitted	-	m	Diaphragm compound		
Max. suction lift wet	Rubber fitted	-	m			
Max. fluid inlet pressure	Rubber fitted	-	MPa	Net Weight	Type A	ALU
						27,0 Kg
Caution! Data based on water (1 Cp)						
Wetted parts: Pump chambers + manifolds			ADC12 - Aluminum			
Motor			ADC12 - Aluminum			

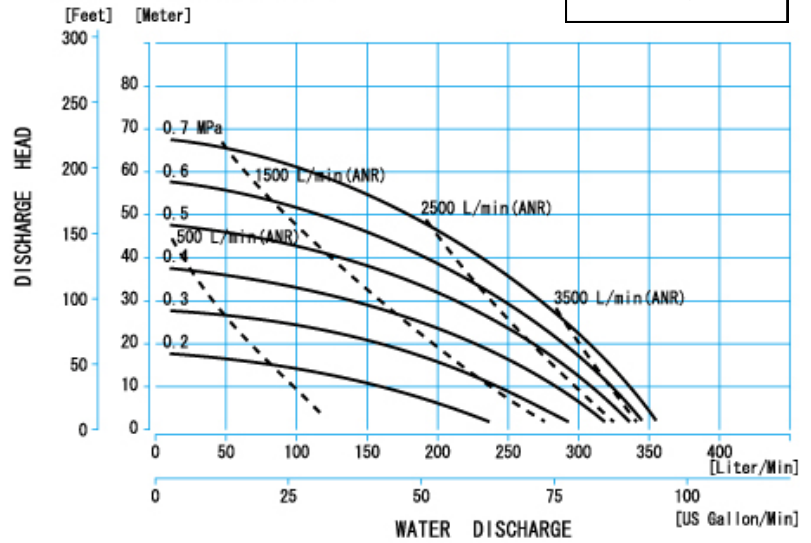