


NDP-50BA □ , BS □ , BF □

1Bar = 0,1MPa



TECHNICAL DATA			Pump type NDP-50BA.-RC(-A)			
Air supply pressure	0,2-0,7	MPa	Max. viscosity (neg. suc.)	10.000	Cp	
Max. discharge volume/cycle	4300	Cc	Max. viscosity (flooded suction.)	30.000	Cp	
Max. discharge volume	630	L/min	Max. air consumption	6000	NL/min	
Max. discharge pressure	0,7	MPa	Max. noise level	82	dB(a)	
Max. size of solids	8	mm	Operating temp. ambient	70	°C	
Max. suction lift dry	PTFE fitted		Max operating temp. fluid			
Max. suction lift wet	PTFE fitted	m	Diaphragm compound	CR/ NBR	82	°C
Max. fluid inlet pressure	PTFE fitted	MPa	Diaphragm compound	EPDM/ TPO	100	°C
Max. suction lift dry	Rubber fitted	5,5	Diaphragm compound	TPEE/FPM	120	°C
Max. suction lift wet	Rubber fitted	9,2				
Max. fluid inlet pressure	Rubber fitted	0,1	MPa	Net Weight	Type A	ALU
						36,0
						Kg
Caution! Data based on water (1 Cp)						
Wetted parts: Pump chambers + manifolds			ADC12 - Aluminum			
Motor			ADC12 - Aluminum			

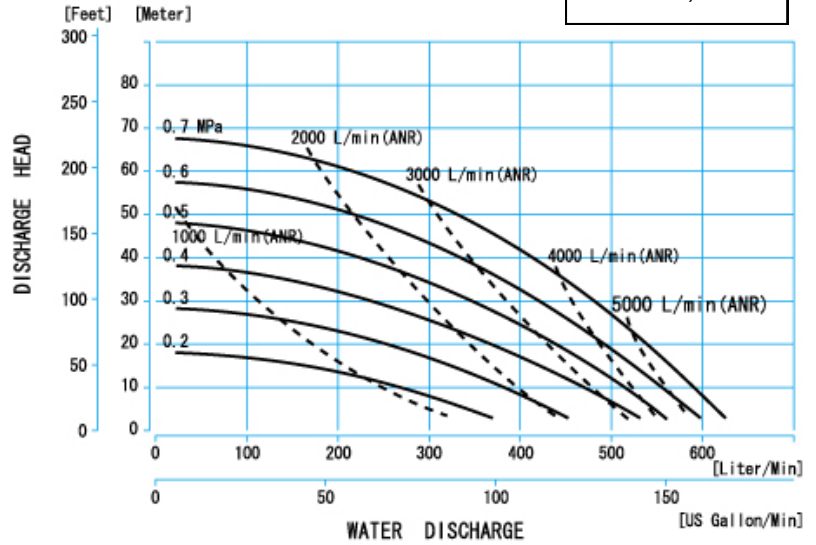