


NDP-50BA □, BS □, BF □

1Bar = 0,1MPa



TECHNICAL DATA			Pump type NDP-50BF.		
Air supply pressure	0,2-0,7	MPa	Max. viscosity (neg. suc.)	10.000	Cp
Max. discharge volume/cycle	4300	Cc	Max. viscosity (flooded suction.)	30.000	Cp
Max. discharge volume	630	L/min	Max. air consumption	6000	NL/min
Max. discharge pressure	0,7	MPa	Max. noise level	82	dB(a)
Max. size of solids	8	mm	Operating temp. ambient	70	°C
Max. suction lift dry	PTFE fitted	m	Max operating temp. fluid		
Max. suction lift wet	PTFE fitted	m	Diaphragm compound	CR/ NBR	82 °C
Max. fluid inlet pressure	PTFE fitted	MPa	Diaphragm compound	EPDM/ TPO	100 °C
Max. suction lift dry	Rubber fitted	5,5 m	Diaphragm compound	TPEE/FPM	120 °C
Max. suction lift wet	Rubber fitted	9,2 m			
Max. fluid inlet pressure	Rubber fitted	0,1 MPa	Net Weight	Type F	CS
					64,0 Kg
Caution! Data based on water (1 Cp)					
Wetted parts: Pump chambers + manifolds			FC250 - Forged iron type		
Motor			ADC12 - Aluminum		

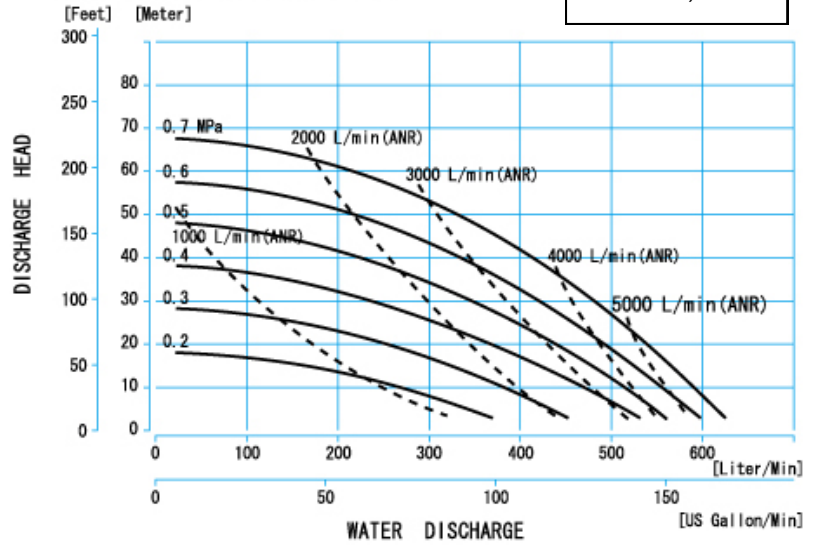