




NDP-50BAT, BST, BFT

1Bar = 0,1MPa

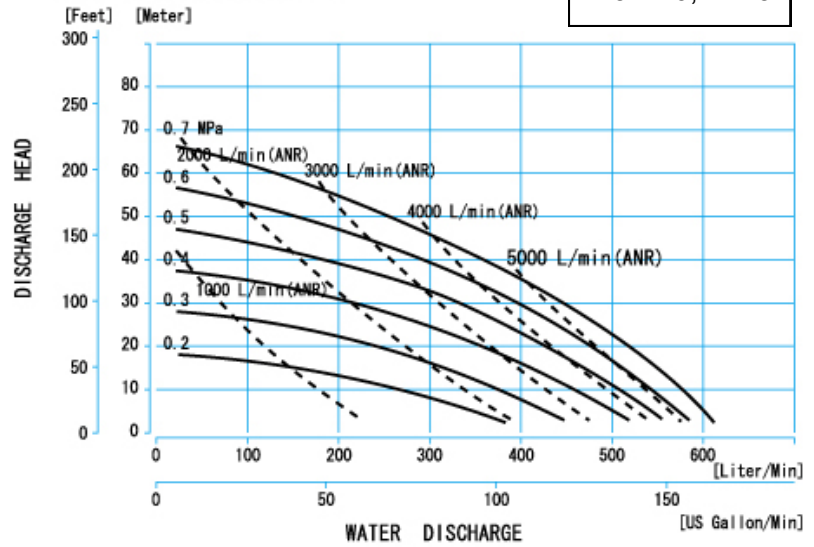

TECHNICAL DATA				Pump type NDP-50BFT(-A)			
Air supply pressure	0,2-0,7	MPa		Max. viscosity (neg. suc.)	10.000	Cp	
Max. discharge volume/cycle	2100	Cc		Max. viscosity (flooded suction.)	30.000	Cp	
Max. discharge volume	600	L/min		Max. air consumption	6000	NL/min	
Max. discharge pressure	0,7	MPa		Max. noise level	82	dB(a)	
Max. size of solids	8	mm		Operating temp. ambient	70	°C	
Max. suction lift dry	PTFE fitted	4,5	m	Max operating temp. fluid			
Max. suction lift wet	PTFE fitted	8,1	m	Diaphragm compound			
Max. fluid inlet pressure	PTFE fitted	0,03	MPa	Diaphragm compound	PTFE	100	°C
Max. suction lift dry	Rubber fitted		m	Diaphragm compound			
Max. suction lift wet	Rubber fitted		m				
Max. fluid inlet pressure	Rubber fitted		MPa	Net Weight	Type F	CS	64,0 Kg
Caution! Data based on water (1 Cp)							
Wetted parts: Pump chambers + manifolds				FC250 - Forged iron type			
Motor				ADC12 - Aluminum			

