


Sanitary Pumps - air operated double diaphragm 1½" models SPSN15NPS and SPSN15NPP

Our Sanitary AODD Pumps are the ideal solution for food processing and pharmaceutical applications. The unique design enables operators to sanitize CIP or COP.

Our sanitary AODD pumps feature:

- highly polished SS316 components (32 Ra),
- a swivel mounting stand
- an energy-efficient, oil-free air valve system
- available with exclusive FUZED PTFE or highly efficient Santoprene diaphragms

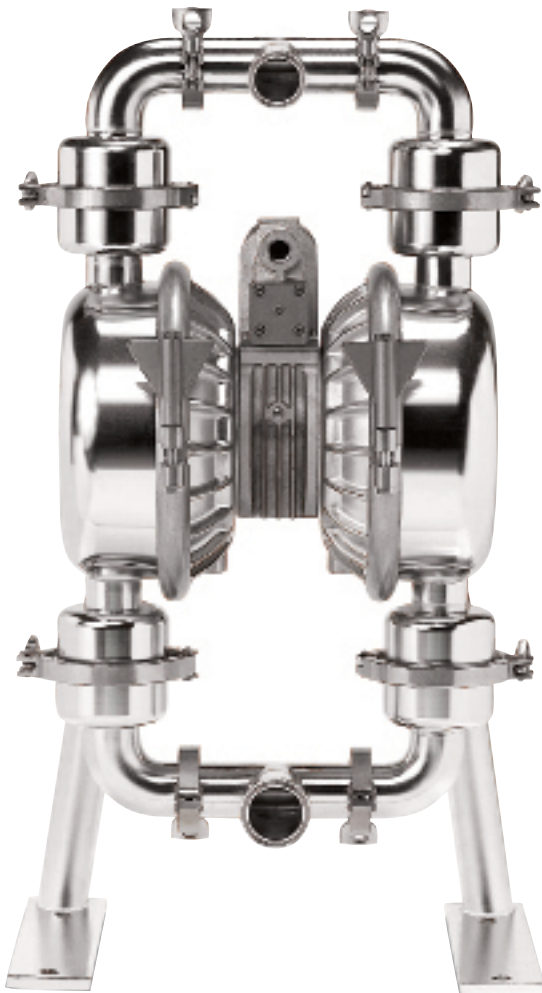

Technical Specifications

Max Flow.....	325,5 L/min
Max Air Supply or Liquid Pressure.....	6,9 bar
Max Particle Size (Dia.).....	9,5 mm
Suction Lift.....	6,10 m dry / 7,62 m wet
Temperature Range	-37° C to 134° C
Elastomers	Santoprene / PTFE
Center Block.....	Nickel Plated Aluminum
Wetted Section.....	SS316L-Polished to 32 Ra
Port Configuration.....	Center Horizontal
Intake / Discharge Connection	1½" Tri-Clamp
Air Inlet / Exhaust.....	½" NPT / ¾" NPT
Noise Level.....	101 db (A)



APPLICATIONS:


Pie Fillings	Condiments	Purees
Salad Dressing	Chocolate	Ice Cream
Juice Concentrates	Dough	Paste
Sauces	Flavorings	Fructose

Sanitary Pumps - air operated double diaphragm 2" models SPSN20NPP / -NPS / -SSP / -SSS

Sanitary AODD Pumps are the ideal solution for food processing and pharmaceutical applications. The unique design enables operators to sanitize CIP or COP.

Our sanitary AODD pumps feature:

- highly polished SS316 components (32 Ra),
- a swivel mounting stand
- an energy-efficient, oil-free air valve system
- available with exclusive FUZED PTFE or highly efficient Santoprene diaphragms

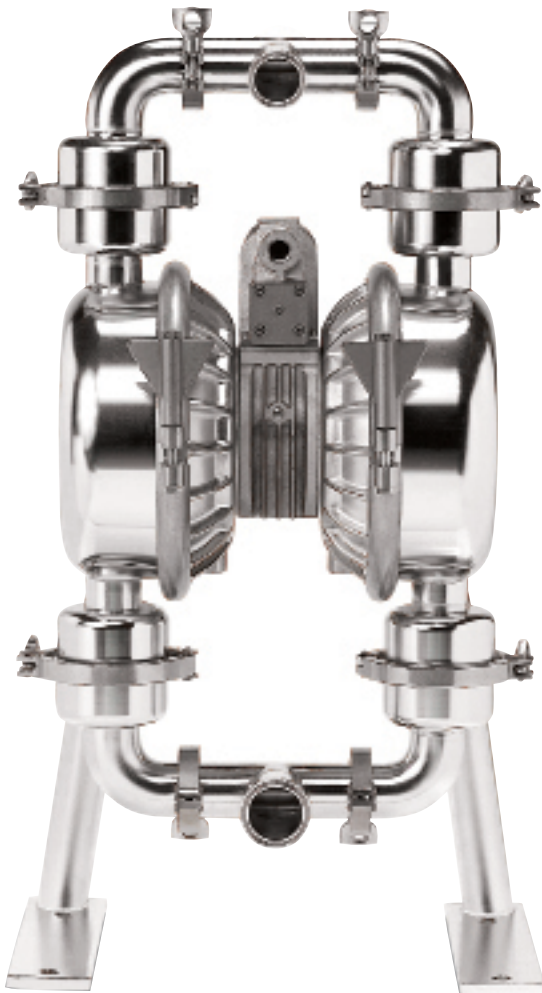

Technical Specifications

Max Flow.....	677 L/min
Max Air Supply or Liquid Pressure.....	6,9 bar
Max Particle Size (Dia.).....	15,9 mm
Suction Lift.....	4,6 m dry / 9,8 m wet
Temperature Range	-37° C to 134° C
Elastomers	Santoprene / PTFE
Center Block.....	Nickel Plated Aluminum / SS316
Wetted Section.....	SS316L-Polished to 32 Ra
Port Configuration.....	Center Horizontal Intake / Discharge Connection
Air Inlet / Exhaust.....	1/2" NPT / 1" NPT
Noise Level.....	98 db (A)



APPLICATIONS:

Pie Fillings	Condiments	Purees
Salad Dressing	Chocolate	Ice Cream
Juice Concentrates	Dough	Paste
Sauces	Flavorings	Fructose